


ES150BA-T9D

Double-gates



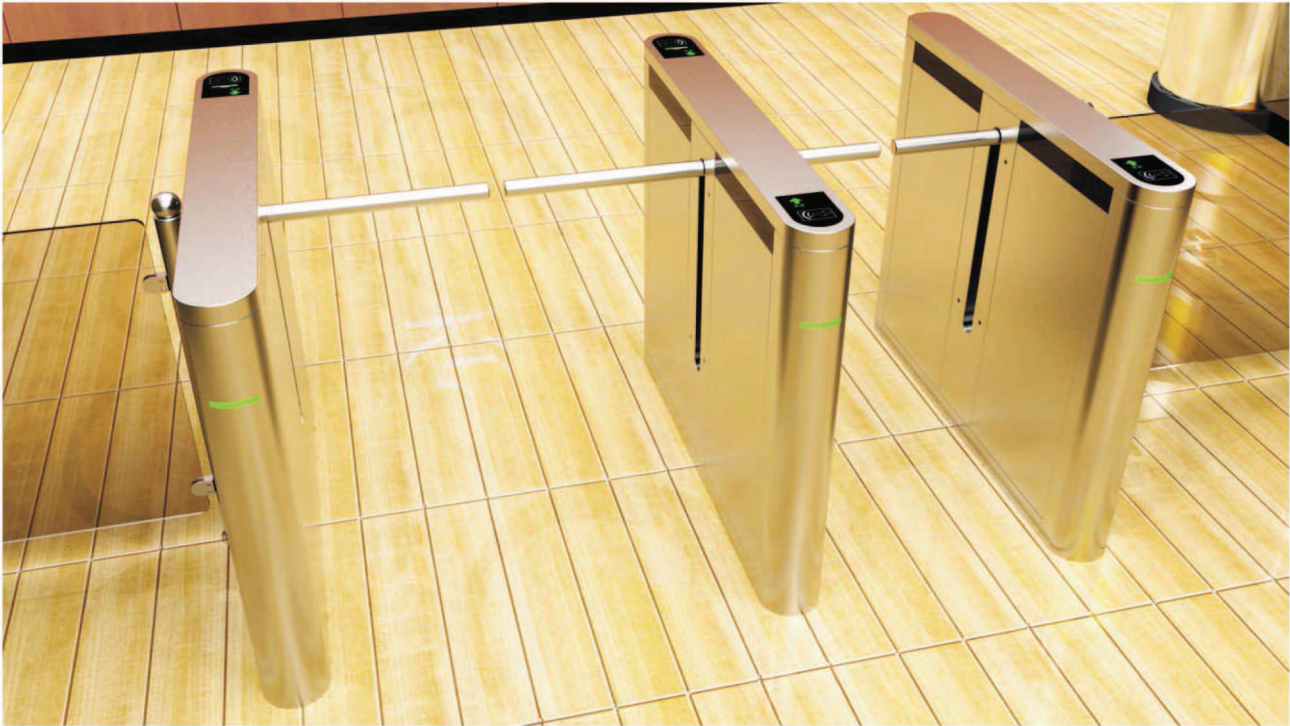

Double-gates ES150BA-T9D

basic specifications:

Equipment type:	ES150BA-T9A-1260S X
Appearance size:	L11200*W150*H1020mm
Material of box:	1.5mm SU 304 Stainless steel
door material:	10mm/8mm PVC Plexiglass
Protection grade:	Level 1
use of occasions:	Indoor
Operating :	Day / Night

Applicable objects:

					
600mm Channel:					
900mm Channel:					

Electrical specifications:

Power Supply:	AC220V 120W
Operating temperature:	0~60°C
Operating humidity:	0~95%
Storage temperature:	-5~50°C

T7C core unit parameter :

Power:	DC24V
Output:	Dynamic:35W Static state:5W Top value:40W
Material:	304 SS and environmental steel
Flap control:	360 ° degree slipping toothed clutch lock; more than 50N*m
Rotational angle:	Max:90° midsplit Double 90°
Speed:	0.6~1.2second
Motor:	Direct current brush brushless or planet reducing motor;
Flap position:	1 division; 360° full angle encoder
Noise:	Not more than 60 db
Lifetime:	Not less than 5 million times
Interface:	I/O; Rs232 or Rs485; TCP/IP



ES150BA-T9A-1260S Size

