


S *SUNGATE*

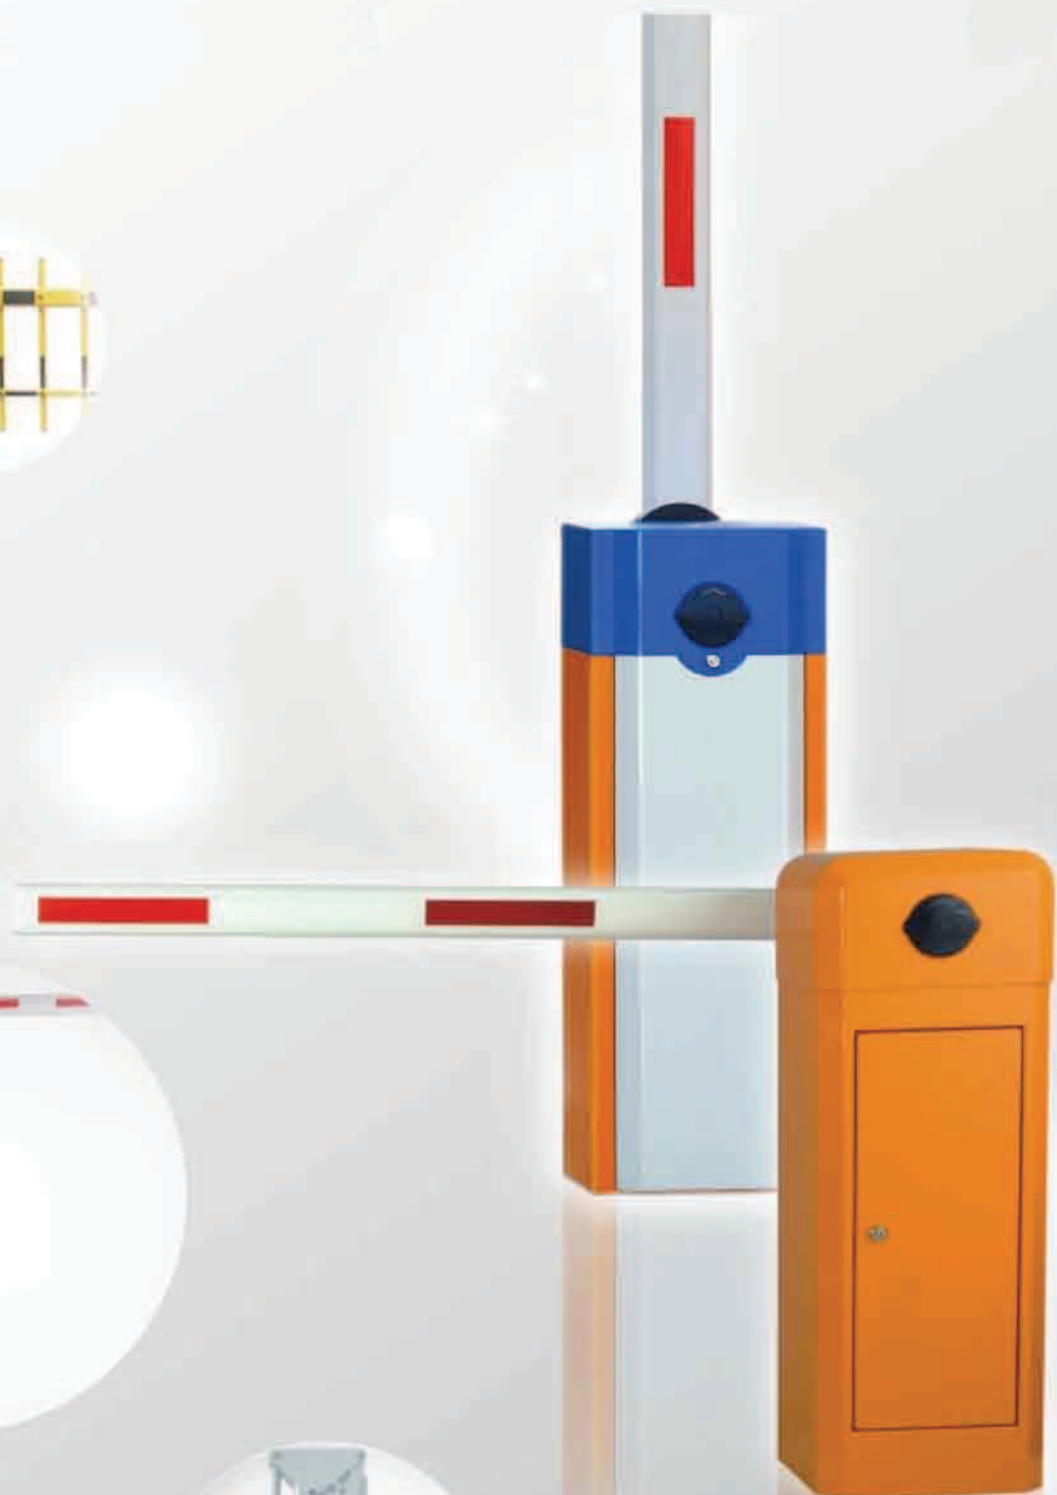


Hot-sale
products

Functions & Features

1. Manual release
2. Machine core with compression spring, effectively avoids the accidents caused by spring breaking.
3. Die-casting aluminum alloy motor, precision and good at thermal radiating
4. Motor cooling fan, solving the problem of heat-protection
5. Double safety limit switches (photoelectricity limit switch/motor memory sensor)
6. Reversing on obstacle
7. Auto-closing
8. Support the INFRARED PHOTOCCELL for anti-bumping function (optional)
9. Support the external and internal VEHICLE LOOP DETECTOR (optional)
10. Traffic light interface
11. Wire control (switch signal)\ Remote control (418MHz)
12. RS485 Communication module (optional)

Technical Data

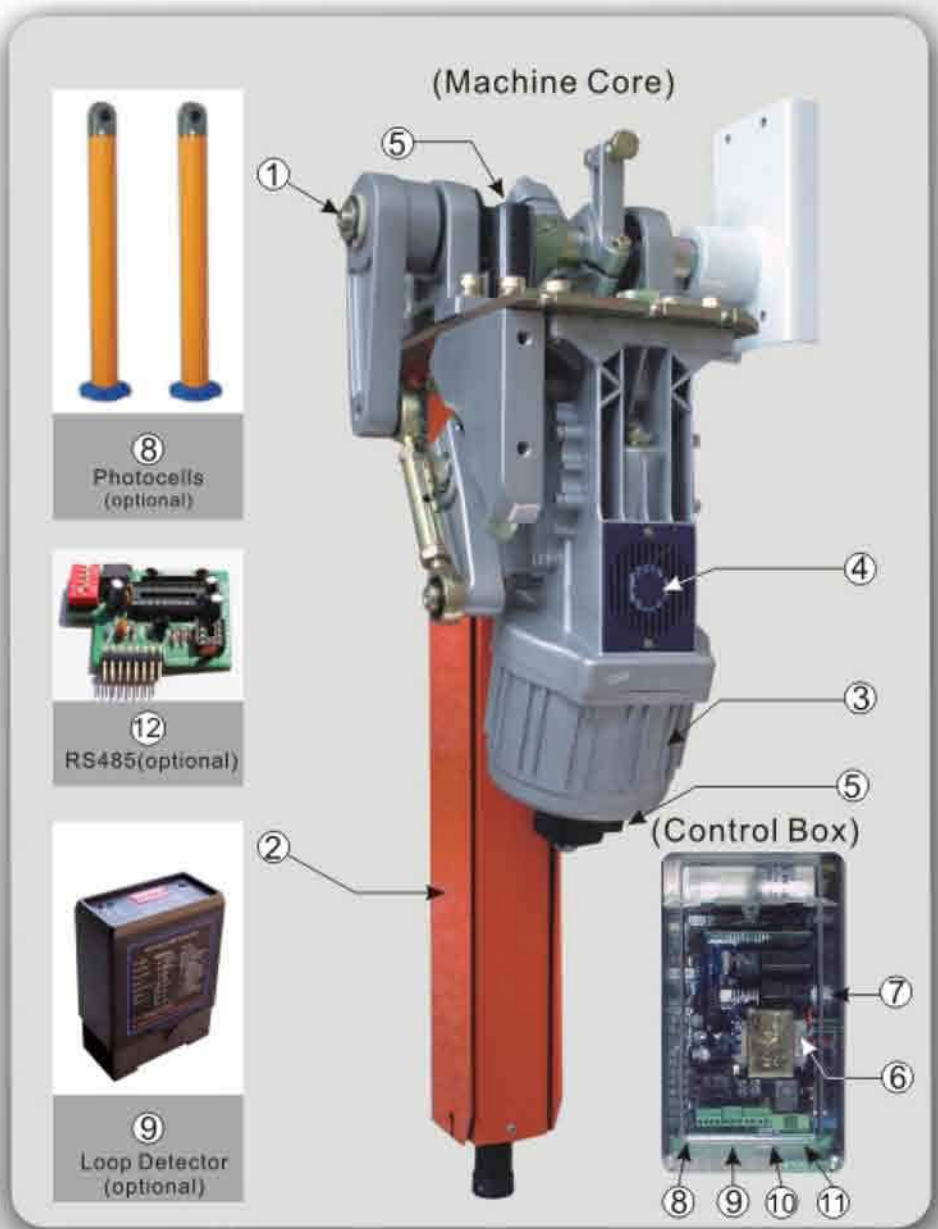

Model	101-11	101-13	101-16	101-23	101-26	101-33	101-36	101-46	101-56
	102-11	102-13	102-16	102-23	102-26	102-33	102-36	102-46	102-56
Running time	1 sec	3 sec	6 sec	3 sec	6 sec	3 sec	6 sec	6 sec	6 sec
Boom type	Straight			90°folding		180°folding		2 fencing	3 fencing
Max Boom length	3 m	4.5 m	6 m	3 m	5 m	3 m	5 m	4.5 m	4 m
Boom dimension (W×H)	45X80mm	45×100 mm							
Boom weight	3kg	4.5kg	6kg	6.5kg	8kg	9kg	11kg	7kg	7.5kg
Voltage	220V±10%,110V±10%								
Frequency	50/60Hz								
Motor voltage	220V								
Power	120W								
Working temperature	-20℃~75℃								
Protection grade	IP44								